


Current Transformer

CT 201 - Split Core

IEC 60044-1






Specification

Highest voltage for equipment U_m (r.m.s.)	0.72 kV
Rated power-frequency withstand voltage (r.m.s.)	3 kV
Rated short-time thermal current (I _{th})	60 I _{pn}
Rated dynamic current (I _{dyn})	2.5 I _{th}
FS	5
Class of Insulation	E
Rated frequency	50 ... 60 Hz
Working temperature	0° ... 50° C
Storage temperature	-10° C ... +70° C
Relative humidity	95% (non condensing)
Case / Color	PC V0 / Black
Weight (approx.)	800 gr

Sales Package :

- Fastening screw (M5x60) + Nut M6 : 4 pcs
- Mounting clad : 4 pcs
- QC sheet : 1 pcs

Dimension (mm)

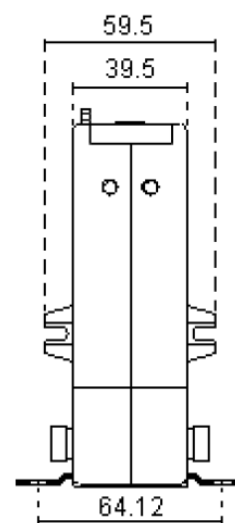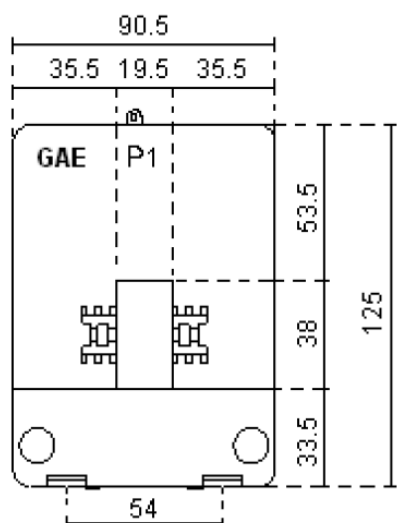

Ordering Code

Rated Current Ipn/Isn	Class 1		Class 0.5	
	Rated Output (VA)	Ordering Code	Rated Output (VA)	Ordering Code
200/5A	2.5	20Q00	-	-
250/5A	5	20Q01	1.5	20Q02
300/5A	5	20Q03	1.5	20Q04
400/5A	7.5	20Q05	5	20Q06